


WELL LIGHTS 12FX-120V-405

Product Description

This water tight well light is designed for in ground use where a flush, or hidden light would be ideal. Constructed of Fiberglass.

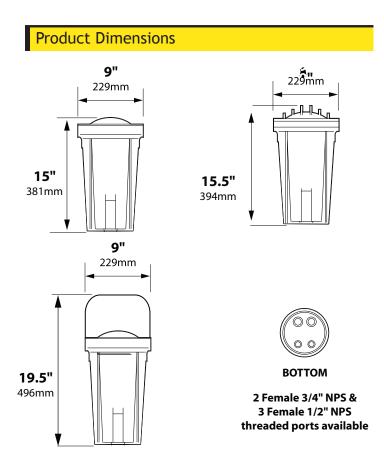

Features & Benefits

- » Self- Ballasted
- » Available in Aluminum or Brass



Specifications

 » Construction:
Body- Fiberglass reinforced bronze composite with molded brass inserts for screws.
Lens Holder & Grate- Fiberglass reinforced bronze composite, cast aluminum or cast brass

- » Lens: High Impact clear tempered convex glass
- » Lamp Supplied: None (100w Max)
- » Lamp Options: 9W, 15W or 21W Arrow LED

» Socket: PAR Lamps: High Temperature ceramic

[»] **Reflector:** Highly polished specular aluminum

"Wiring: Standard 120v Black, White and Ground 9" lead wires

 » Finish: Aluminum Lens Holder/Grate- Black texture polyester powder coat. Optional finishes available.
Brass Lens Holder/Grate- Unfinished Brass. Optional finishes available

Certifications





WELL LIGHTS 12FX-120V-405

Example Order: 12SL-120V-405-A-01-BLT

12FX-12V-405 1	2 3		
1. MATERIAL (LENS HOLDER/GRATE) A: ALUMINUM B: BRASS	2. LAMP OPTION 01: 9W ARROW LED 02: 15W ARROW LED 03: 21W ARROW LED	3. COLOR BLT: BLACK TEXTURE (STANDARD) ATV: ANTIQUE VERDE BRT: BRONZE TEXTURE CAM: CAMEL TONE CPR: CHROME POWDER HTX: HUNTER TEXTURE RBV: RUBBED VERDE RST: RUST STU: STUCCO WBR: WEATHERED BROWN WIR: WEATHERED IRON BAR: BRASS ACID RUST BAV: BRASS ACID VERDE BAT: BRASS BLACK ACID	